



**GP series**

**GP 12170 12V 17AH**




**Valve Regulated Lead Acid Battery**

Maintenance-Free Sealed Lead Acid Battery.  
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

**Design for Standby Power Applications**

<p><b>【Design Life】</b> Up to 5 Years in Standby Service at 25°C Eurobat (20°C) : 3-5 years, Standard Commercial</p> <p><b>【Operating Temperature Range】</b> Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge : -15°C ~ 40°C (5°F~104°F) Storage : -15°C ~ 40°C (5°F~104°F)</p>	<p><b>【Float Charging Voltage】</b> 13.5 ~ 13.8 VDC/Unit at 25°C (77°F)</p> <p><b>【Equalization Charging Voltage】</b> 14.4 ~ 15.0 VDC/Unit at 25°C (77°F)</p> <p><b>【Self Discharge】</b> Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).</p>
--	---

Specification		Design according with IEC 61056-1/2: 2012	
Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	17 Ah @20hr-rate to 1.75V per cell @25°C (77°F)		
Weight	Approx. 5.50 Kg (12.12 lbs)		
Maximum Discharge Current	230A (5sec)		
Internal Resistance	Approx. 14.0mΩ		
Short Circuit Current	532A		
Maximum Charge Current	5.10A		
Terminal types	B1/B3/B1B terminal to accept M5 bolt		
Terminal Breaking Torque	59 Kgf-cm / 51 Lbf-in / 5.73 N-m		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	181.0±2.0 mm	7.13±0.08 inch
	Width (W)	76.2±1.0 mm	3.00±0.04 inch
	Container Height (h)	167.0±2.0 mm	6.57±0.08 inch
	Overall Height (H)	167.0±2.0 mm	6.57±0.08 inch

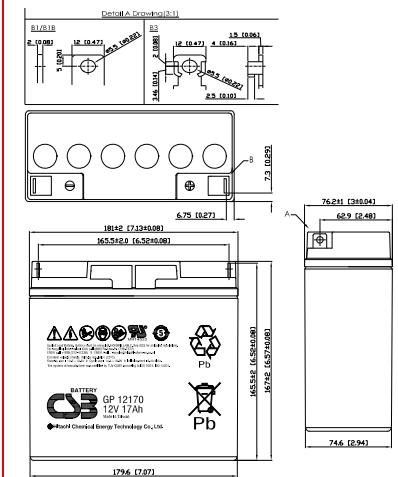

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)													
F.V/Time	5 MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR	
1.60V	80.2	50.9	38.5	23.4	13.8	10.1	8.03	5.72	3.63	2.37	1.93	1.00	
1.67V	71.2	47.5	36.5	22.9	13.7	10.0	7.99	5.69	3.61	2.35	1.90	0.95	
1.70V	67.4	45.8	35.6	22.7	13.6	9.99	7.97	5.67	3.60	2.34	1.89	0.94	
1.75V	61.0	43.1	34.1	22.3	13.4	9.86	7.92	5.64	3.59	2.32	1.86	0.91	
1.80V	54.5	40.2	32.7	21.8	13.3	9.79	7.87	5.61	3.58	2.30	1.83	0.88	
1.85V	48.0	37.3	31.0	21.2	13.1	9.68	7.80	5.56	3.56	2.27	1.80	0.85	

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)													
F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR	
1.60V	890	583	449	281	166	121	96.4	68.6	43.6	28.4	23.1	12.0	
1.67V	790	544	423	275	164	120	96.0	68.5	43.4	28.3	22.8	11.5	
1.70V	748	527	413	272	163	119	95.8	68.4	43.3	28.2	22.7	11.3	
1.75V	677	493	395	267	161	119	95.3	67.9	43.2	27.9	22.4	10.9	
1.80V	605	460	377	261	160	118	94.6	67.3	43.0	27.6	22.0	10.5	
1.85V	533	427	361	254	158	116	93.8	66.8	42.9	27.3	21.7	10.1	

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com) Issued: 180205

**Sales Offices**  
**日立化成能源科技股份有限公司**  
 Hitachi Chemical Energy Technology Co., Ltd.

**BUSINESS HEADQUARTERS**  
 Tel: +886-2-2880-5600  
 Fax: +866-2-2888-3300

**USA OFFICE**  
 Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)  
 Fax: +1-817-244-4445

**SHENZHEN OFFICE (CHINA)**  
 Tel: +86-755-8831-6488, 8831-6775  
 Fax: +86-755-8831-6075

**EUROPE (EMEA) OFFICE**  
 Tel: +31(0)180-418-140  
 Fax: +31(0)180-418-327

**SHANGHAI OFFICE (CHINA)**  
 Tel: +86-21-5046-1622, 5046-0833  
 Fax: +86-21-5046-1046

**TAIPEI OFFICE**  
 Tel: +886-2-2880-5600  
 Fax: +866-2-2888-3300

**BEIJING OFFICE (CHINA)**  
 Tel: +86-10-5820-5336, 5820-5338  
 Fax: +86-10-5820-3053

